ProSpex® 100 Adjustable LU103-MH

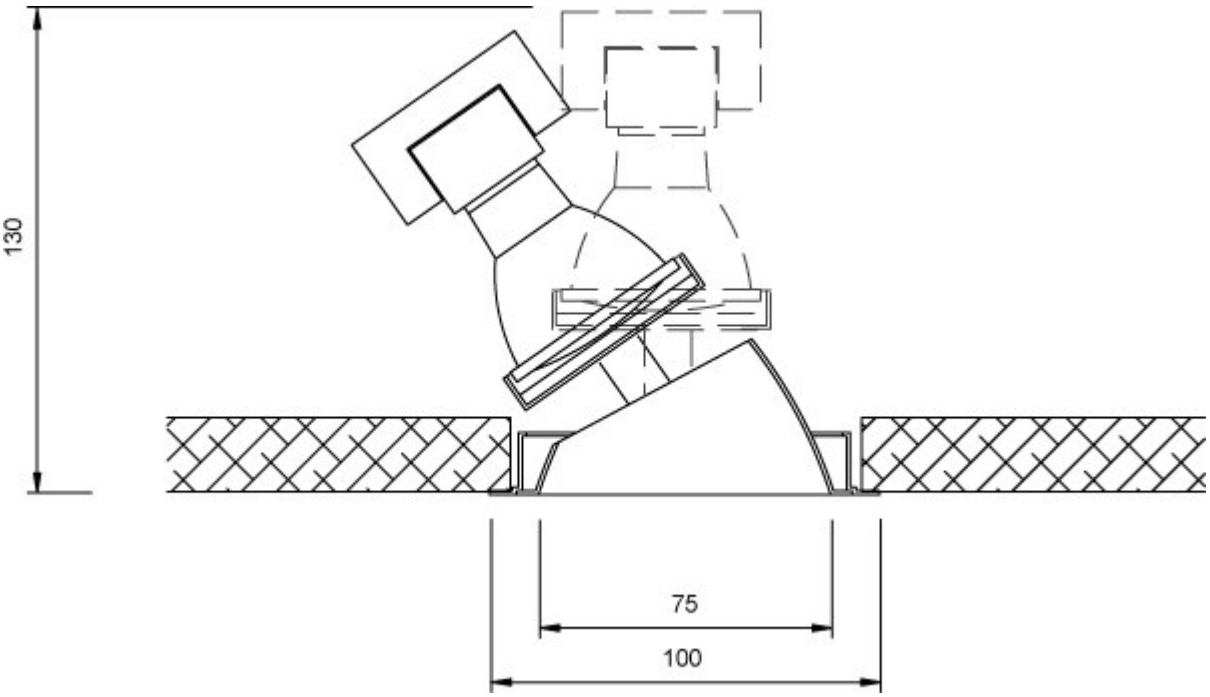

90 35° 360° 950°

Ordering Information

Fixture	Lamp	Mounting	ReflectorFinish	IPRating
103	MR - MR16 (low voltage) MH - CMH/MR16 (Metal Halide) QT - QT12 (Low Voltage) LED - ProSpex LED engine XSM - Xicato LED module	TR - Trimmed TL - Trimless	PS - Polished Silver SS - Satin Silver WH - White BK - Black CG - Champagne Gold	IP - IP44

Ref Number:	103-MH
Lamp	CMH-MR16
Lamp holder	GX10
Lamp wattage	20-35

Adjustable downlight with specular cut reflectors to minimise view into fixture.
Minimal white ceiling trim.
Low glare 40° visual cut off.
ProAim hot aim and lock.
Locking tilt to 35° with locking 360° rotation.
Reflector with retaining spring to ensure correct installation.
Aluminium heat sink on lampholder.
Reflectors available in other finishes.
Overall diameter 100mm
Ceiling cut out 90mm
Maximum height 130mm
Control gear to be ordered separately.
Specify wattage.

+33(0)1 41 36 07 70

www.atea.fr