



DISTANCE ULTRA EFFICIENCY 90

Linear strip high efficiency CRI90 up to 35m one end powered
Ruban LED haute efficacité IRC90 de longueur jusqu'à 35m
A4127



Temperature de couleur CCT	
1800K - 2100K - 2300K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K - 6500K	
Precision de couleur & IRC	Color consistency & CRI
OneBinOnly >90	
Rendement lumineux	Luminous Efficacy (@4000K)
125 lm/w	
Puissance & nombre de led	Power & number of Led
10 w/m & 140 leds/m	
Coupe Cutting unit	
100 mm	
Dimensions Dimensions	
35000 x 10 x 1,2 mm	
Tension d'alimentation & Classe isolation	
Input voltage & Class	
48 Vdc Class III	
Température d'utilisation	
Ambiant temperature	
- 10°C / + 40°C	

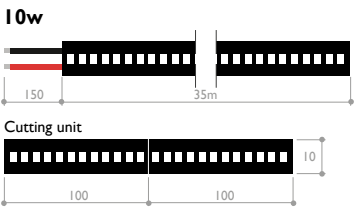

A4127.10.140.930.IP20.DALI		
Power & number leds/m		
10 w/m & 140 leds/m		
Custom power on request (5 to 15W)		
CCT & luminous flux/m		
1800K	1000 lm	918
2100K	1050 lm	921
2300K	1100 lm	923
2700K	1150 lm	927
3000K	1200 lm	930
3500K	1200 lm	935
4000K	1250 lm	940
5000K	1250 lm	950
6000K	1250 lm	960
6500K	1250 lm	965
IP Rating		
IP20		
IP54 (Wet indoor)		
IP65H		
Pour des IP supérieur, veuillez nous consulter		
For higher IP ratings, please contact us.		
Dimming		
No dimming		
Dali		
Dmx		
Dimming 0/1-10V		
Casambi		